



Gillain & Co
HYGIENIC EQUIPMENT FOR FOOD & LIFE SCIENCES



Click & clean Decentral Hygienic satellite FFR

The most hygienic, robust and reliable cleaning satellite on the market.

The Click & clean decentral satellite is available in wall mounted or mobile version.

With a single lever the operator can change between the different medias. Only compressed air, water and electric power are to be connected to the unit.

Functions:

- Foam cleaning
- Foam disinfection
- Clear water rinse

Click & clean Decentral units are standard equipped with:

Ref. 100.201

- Stainless steel Maintenance free selector valve for water, chemicals and air.
- 2 separated chemical injectors with adjustable dosing ratio (0.15-15%) who makes it impossible to mix-up chemicals.
- Air regulator.
- Air manometer.
- Lockable stainless steel cabinet, with sloped top cover for optimal hygiene.
- 1 x Stainless steel check valve on water supply.
- 2 x stainless steel check valves with extreme chemical resistant Kalrez seals on chemical suction.
- 1 x stainless steel check valve for air supply protection.
- 1 x Check valve with detector when first check valve is failing.
- 1 x bleu suction kit with filter and PVC pipe for foam cleaning chemical.
- 1 x yellow suction kit with filter and PVC pipe for foam disinfectant chemical.
- Set Of 8 dosing tips.

Mobile version is extra equipped with:

Ref. 100.201XM

Click & clean decentral satellite FFR (See here above).

Stainless steel heavy duty trolley

2 x big wheels on the back

2 x swivel wheels with brake in the front.

Container holder for 2 x 25 liter cans.

Stainless steel automatic spring driven hose reel.

20 meter 5 layer hose with textile reinforcements, Foodflex hose, FDA approved.

Max. 50bar /70°C.

Stainless steel isolated ball valve with integrated "3 in 1" triple click nozzle.

Yellow suction hose for disinfection Chemical.

Bleu suction hose for foam cleaning chemical.

Set of 8 dosing tips.

Wall mounted version



Mounting example.
Hose reel and accessories not included.


Mobile version






Technical data:

| | |
|---|---|
| Technical specifications decentral satellite: | |
| Water connection | 1/2" BSP 60° |
| Water pressure | 6 - 200 bar |
| Water temperature | 0 - 90°C. |
| Air connection | 1/2" BSP 60° |
| Air pressure | 5 - 10 bar |
| Basic functions | <ul style="list-style-type: none"> • Foam cleaning • Foam Disinfection • Clean water rinse |
| Chemical injectors | 2 - 100% separated |
| Dosing ratio | 0.15 - 15% |
| Materials | Stainless steel |
| Dimensions (HxWxD): | 1000 x 650 x 400mm. |

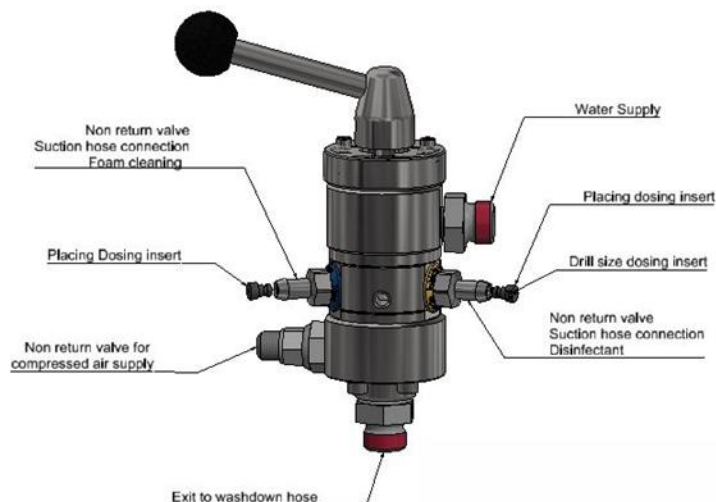

Connection and use Click & clean decentral hygienic FFR satellite (wall mounted version).

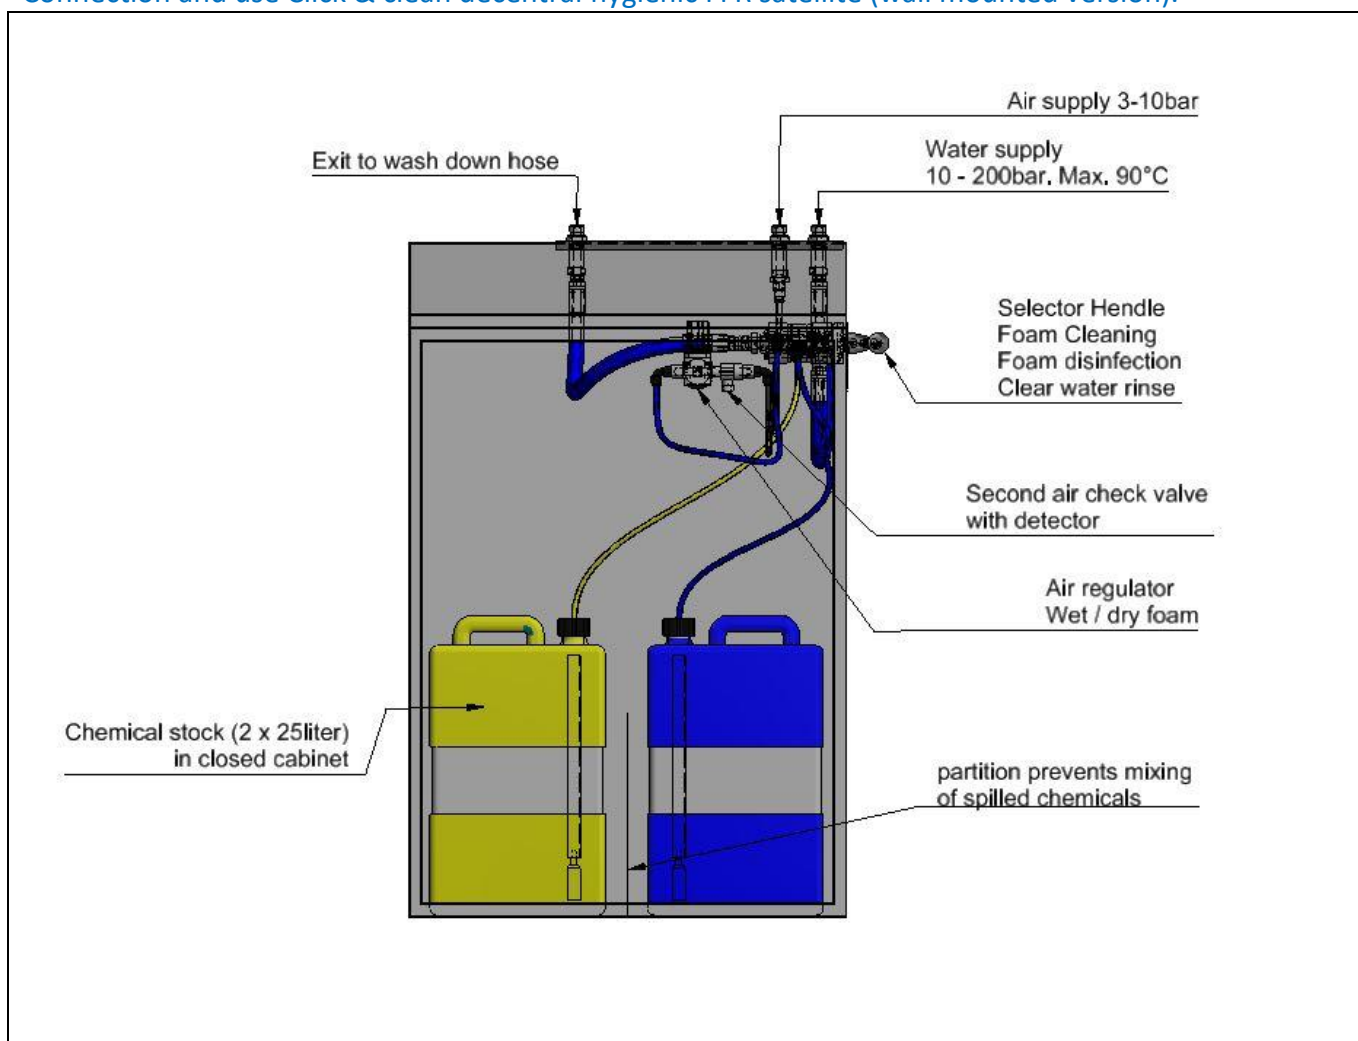




Gillain & Co
HYGIENIC EQUIPMENT FOR FOOD & LIFE SCIENCES




Wall Mounting example satellite

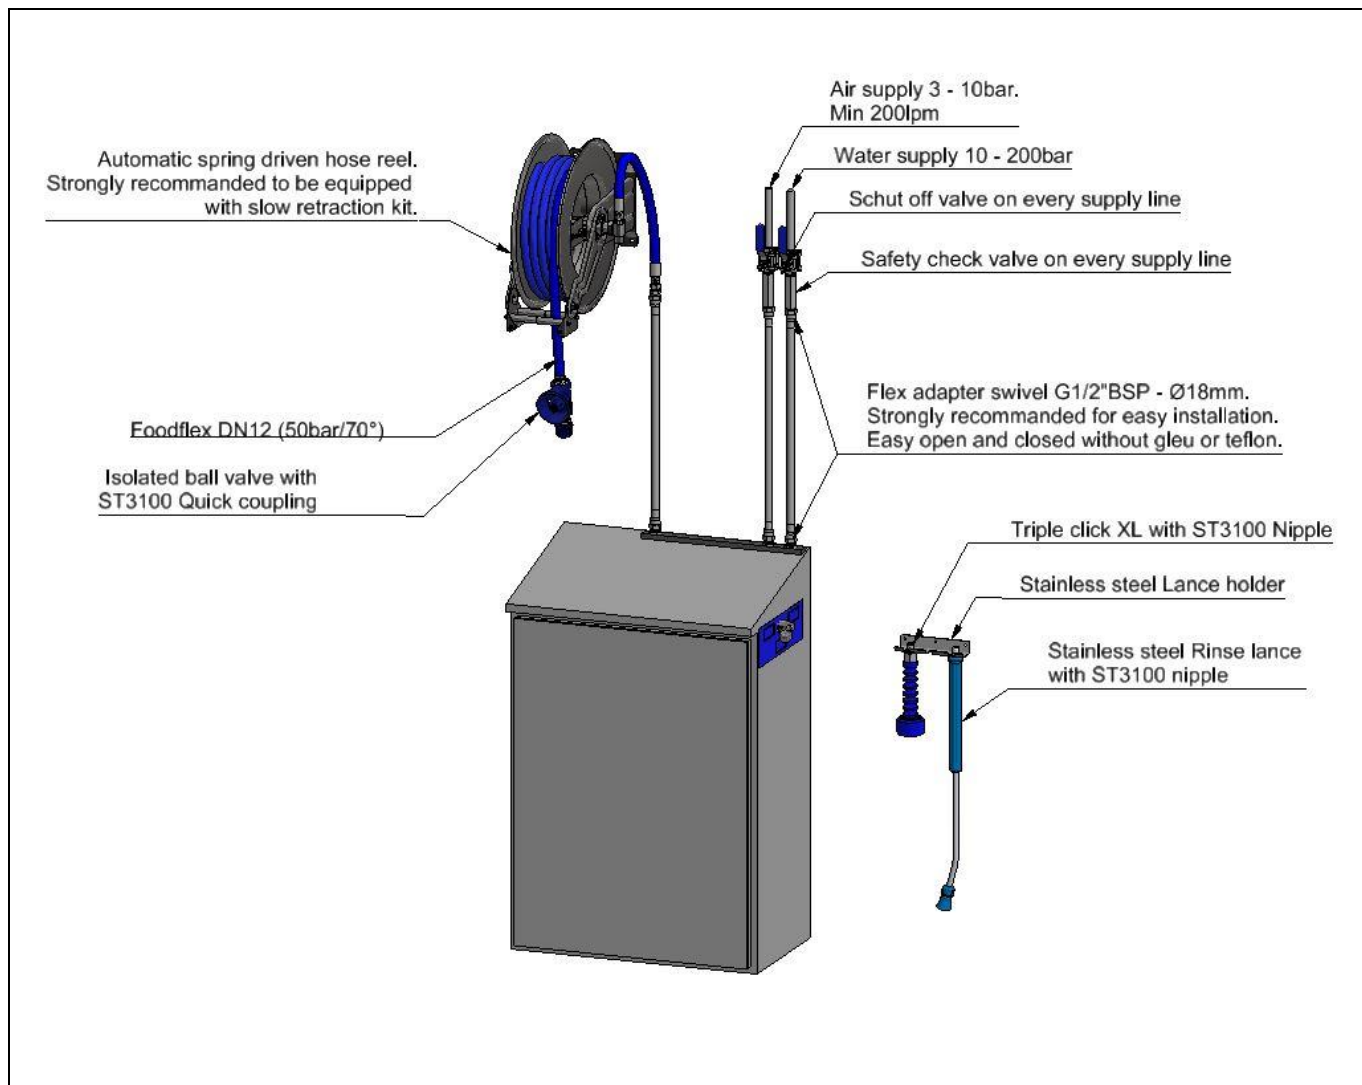


Connections – pipe mounting

Top view - pipe connections G1/2" M - BSP 60°

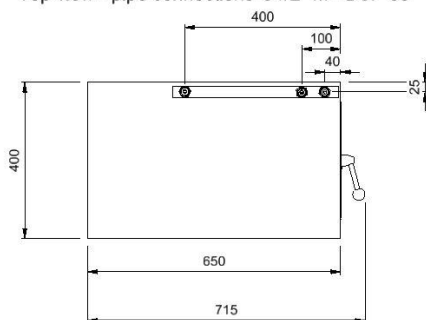







Most common accessories for wall mounted versions:

| <p>Stainless steel automatic spring loaded hose reels with optional wall swivel. Let the hose reel turn 180° on the wall. Standard version 200bar / 90°C. Optional in 400 or 600 bar version.</p> <p>Available lengths for Click & clean satellite FFR</p> <table><tr><th colspan="2">Available lengths hose reels for satellites</th><th>Wall swivel</th></tr><tr><td>Ref. 260.AV 1000</td><td>15 meter ½" hose.</td><td>Ref. 260.ST15</td></tr><tr><td>Ref. 260.AV 1100</td><td>20 meter ½" hose.</td><td>Ref. 260.ST20</td></tr><tr><td>Ref. 260.AV 3400</td><td>25 meter ½" hose.</td><td>Ref. 260.ST34</td></tr><tr><td>Ref. 260.AV 3500</td><td>35 meter ½" hose.</td><td>Ref. 260.ST30</td></tr></table> <p>Hoses are not included.</p> | | Available lengths hose reels for satellites | | Wall swivel | Ref. 260.AV 1000 | 15 meter ½" hose. | Ref. 260.ST15 | Ref. 260.AV 1100 | 20 meter ½" hose. | Ref. 260.ST20 | Ref. 260.AV 3400 | 25 meter ½" hose. | Ref. 260.ST34 | Ref. 260.AV 3500 | 35 meter ½" hose. | Ref. 260.ST30 |  |
|--|---|---|---|---------------|------------------|-------------------|------------------|------------------|-------------------|---------------|------------------|---|---------------|------------------|-------------------|---------------|---|
| Available lengths hose reels for satellites | | Wall swivel | | | | | | | | | | | | | | | |
| Ref. 260.AV 1000 | 15 meter ½" hose. | Ref. 260.ST15 | | | | | | | | | | | | | | | |
| Ref. 260.AV 1100 | 20 meter ½" hose. | Ref. 260.ST20 | | | | | | | | | | | | | | | |
| Ref. 260.AV 3400 | 25 meter ½" hose. | Ref. 260.ST34 | | | | | | | | | | | | | | | |
| Ref. 260.AV 3500 | 35 meter ½" hose. | Ref. 260.ST30 | | | | | | | | | | | | | | | |
| <p>Ref. 260.KIT BK</p> <p>Slow retraction kit for automatic spring driven hose reels. Prevents the hose from quickly rewinding on the hose reel. Safety for user product and environment.</p> <p>Video: https://www.youtube.com/watch?v=FGGcD6xZ10s</p> | |  | | | | | | | | | | | | | | | |
| <p>Foodflex PVC wash down hoses.</p> <p>5 Layer hose with textile reinforcement. FDA Approved. Max. 50Bar / 70°C.</p> <p>Hoses are standard equipped with stainless steel ½" MF adapters and ferrules.</p> <table><tr><td>Ref.30350X1,5</td><td>1,5 meter(connection satellite and hose reel)</td></tr><tr><td>Ref. 30350X15</td><td>15 meter length.</td></tr><tr><td>Ref. 30350X20</td><td>20 meter length.</td></tr><tr><td>Ref. 30350X25</td><td>25 meter length.</td></tr><tr><td>Ref. 30350X35</td><td>35 meter length.</td></tr></table> | | Ref.30350X1,5 | 1,5 meter(connection satellite and hose reel) | Ref. 30350X15 | 15 meter length. | Ref. 30350X20 | 20 meter length. | Ref. 30350X25 | 25 meter length. | Ref. 30350X35 | 35 meter length. |  | | | | | |
| Ref.30350X1,5 | 1,5 meter(connection satellite and hose reel) | | | | | | | | | | | | | | | | |
| Ref. 30350X15 | 15 meter length. | | | | | | | | | | | | | | | | |
| Ref. 30350X20 | 20 meter length. | | | | | | | | | | | | | | | | |
| Ref. 30350X25 | 25 meter length. | | | | | | | | | | | | | | | | |
| Ref. 30350X35 | 35 meter length. | | | | | | | | | | | | | | | | |
| <p>Foodjet Rubber wash down hose</p> <p>5 Layer hose with textile reinforcement. Max. 80Bar / 150°C.</p> <p>Hoses are standard equipped with stainless steel ½" MF adapters and ferrules.</p> <table><tr><td>Ref.30360X1,5</td><td>1,5 meter(connection satellite and hose reel)</td></tr><tr><td>Ref. 30360X15</td><td>15 meter length.</td></tr><tr><td>Ref. 30360X20</td><td>20 meter length.</td></tr><tr><td>Ref. 30360X25</td><td>25 meter length.</td></tr><tr><td>Ref. 30360X35</td><td>35 meter length.</td></tr></table> | | Ref.30360X1,5 | 1,5 meter(connection satellite and hose reel) | Ref. 30360X15 | 15 meter length. | Ref. 30360X20 | 20 meter length. | Ref. 30360X25 | 25 meter length. | Ref. 30360X35 | 35 meter length. |  | | | | | |
| Ref.30360X1,5 | 1,5 meter(connection satellite and hose reel) | | | | | | | | | | | | | | | | |
| Ref. 30360X15 | 15 meter length. | | | | | | | | | | | | | | | | |
| Ref. 30360X20 | 20 meter length. | | | | | | | | | | | | | | | | |
| Ref. 30360X25 | 25 meter length. | | | | | | | | | | | | | | | | |
| Ref. 30360X35 | 35 meter length. | | | | | | | | | | | | | | | | |
| <p>Ref. 140.113</p> <p>Isolated stainless steel ball valve with integrated "3in1" triple click nozzle.</p> <p>This system prevents nozzles from being lost if they have to be changed when rinsing, foaming or disinfecting. Here no use is made of quick couplings where O rings have to be replaced frequently. With this system nozzles are fixed on the valve and cannot be removed. Insulated against heat and shock resistant.</p> | |  | | | | | | | | | | | | | | | |





Gillain & Co
HYGIENIC EQUIPMENT FOR FOOD & LIFE SCIENCES



| | |
|--|--|
| <p>Ref.140.114 Isolated stainless steel ball valve with ST3100 quick coupling. Max. 60bar/90°C. For users who want to work with triple click nozzle (XL version) and need to switch to long rinse lance in some cases.</p> |  |
| <p>Ref. 140.145XL Stainless steel triple click nozzle (3in1) equipped with short lance and ST3100 quick adapter.</p> |  |
| <p>Ref. 40.2300.60 Stainless steel lance 1000mm with isolation and nozzle protector with ST3100 quick adapter. Nozzle not included.</p> |  |
| <p>Ref. 270.110 Stainless steel heavy duty wall support for 2 x 25liter canisters.</p> |  |

Mounting equipment:

| | |
|--|---|
| <p>Ref. DKR12G12D18 Flex adapter. Max. 250bar/150°C. Stainless steel adapter with on 1 side G1/2" swivel BSP 60° conical and on other side Ø18mm stainless steel pipe. The pipe can be welded, crimped or connected with bi-conic adapters. The swivel adapts to ½" BSP 60° nipples without any glue, sealants or Teflon.</p> |  |
| <p>Ref. 200264540 Stainless steel non return valve. ½" F in/out. Max. 400bar/90°C.</p> |  |



Gillain & Co
HYGIENIC EQUIPMENT FOR FOOD & LIFE SCIENCES



Mobile Click & clean satellite.

The mobile click & clean satellite is standard equipped with:

- Click & clean decentral satellite FFR.
- Stainless steel heavy duty trolley.
- 2 x big wheels on the back
- 2 x swivel wheels with brake in the front.
- Container holder for 2 x 25 liter cans.
- Stainless steel automatic spring driven hose reel.
- 20 meter 5 layer hose with textile reinforcements, Foodflex hose, FDA approved. Max. 50bar /70°C.
- Stainless steel isolated ball valve with integrated "3 in 1" triple click nozzle.

