



# ATEX Addendum to Unique SSV

## Unique SSV ATEX Standard

### General Information

The new generation that meets the highest demands of your process in terms of hygiene and safety. Certified to EHEDG.

### Application

Unique Single Seat ATEX Valve is a pneumatic seat valve in a hygienic and modular design for a wide field of applications, e.g. as a Shut-off valve with two (2) or three (3) ports or as a Change-over valve with three (3) to five (5) ports.

### Working principle

The valve is remote-controlled by means of compressed air. It has few and simple moveable parts which results in a very reliable valve and low maintenance cost.

### Standard design

The Unique Single Seat ATEX Standard Valve comes in a one or two body configuration. To ensure a high degree of flexibility the valve seat between the two bodies in the Change-over version is loose. The valve features an optimized life span of the seals through a defined compression design. The actuator is connected to the valve body using a yoke and all components are assembled with clamp rings.

To facilitate installation the valve is only partly assembled when delivered. The valve has welding ends as standard and is available with fittings as option.

The Unique Single Seat ATEX Standard Valve range covers the sizes from DN25 to DN100 and DN/OD 25 mm to 101.6 mm.

The actuator comes with a 5 years warranty.

The valve is made in accordance with ATEX.



EEX II 2 DG c T4

### Other valves in the same basic design

The Unique SSV valve range includes several purpose built valves. Below listed are some of the valve models available, though please use the Alfa Laval computer aided selection tool (CAS) for full access to all models and options.

- Reverse acting valve.
- Tank Outlet valve.
- Tangential valve.

Unique Single Seat Valve is designed, tested and approved according to EHEDG guidelines.







Unique Single Seat ATEX Standard Change-over and Shut-off Valve







## Pressure drop/capacity diagrams

### Change-over Valves

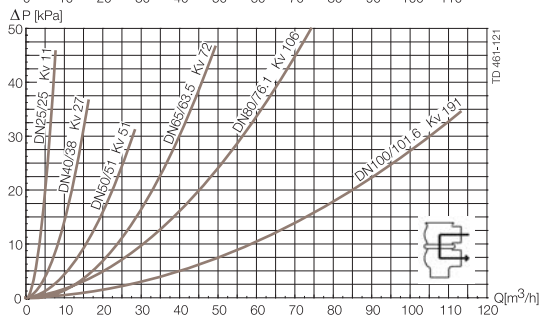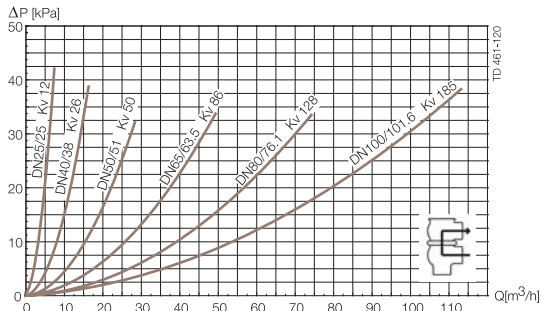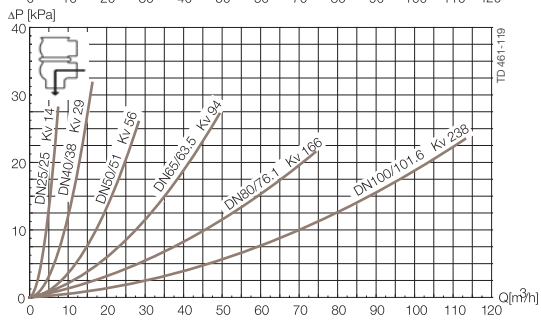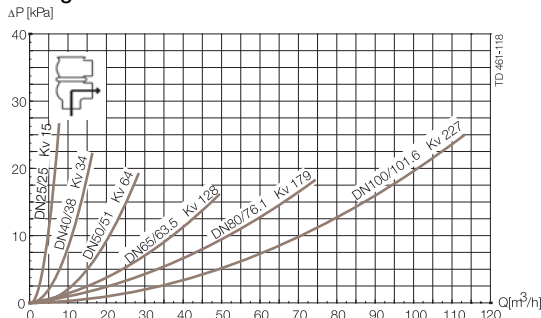

### Shut-off Valves

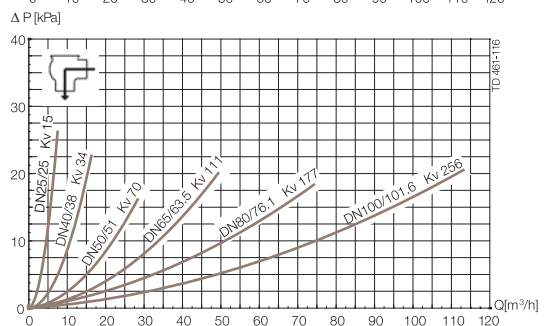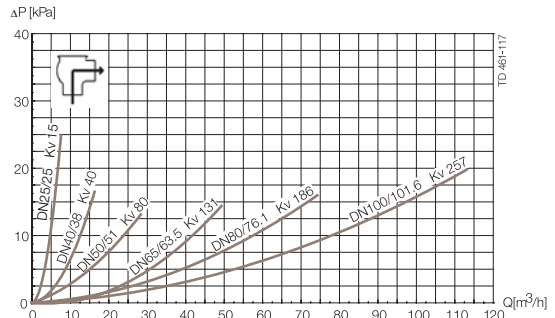

### Note!

For the diagrams the following applies:

Medium: Water (20° C)

Measurement: In accordance with VDI2173



**Pressure data for Unique Single Seat Valve**

**Table 1 - Shut-off and Change-over valves**

Max. pressure in bar without leakage at the valve seat

Actuator / Valve body combination and direction of pressure	Air pressure (bar)	Plug position	Valve size					
			DN 25 DN/OD 25 mm	DN 40 DN/OD 38 mm	DN50 DN/OD 51 mm	DN 65 DN/OD 63.5 mm	DN 80 DN/OD 76.1 mm	DN 100 DN/OD 101.6 mm
TD 461-052_1		NO	10.0	8.2	8.4	4.5	6.8	4.4
TD 461-063_1	5	NO	9.2	4.4	5.9	3.4	4.4	2.9
	6		10.0	7.6	9.6	5.6	7.2	4.8
	7		10.0	10.0	10.0	7.8	10.0	6.7
TD 461-054_1	5	NC	10.0	5.7	6.8	3.7	4.7	3.0
	6		10.0	9.8	10.0	6.1	7.7	5.0
	7		10.0	10.0	10.0	8.5	10.0	6.9
TD 461-055_1		NC	10.0	6.3	7.2	4.2	6.4	4.2
TD 461-057_1	5	A/A	10.0	10.0	10.0	10.0	10.0	9.4
	6		10.0	10.0	10.0	10.0	10.0	10.0
	7		10.0	10.0	10.0	10.0	10.0	10.0
TD 461-056_1	5	A/A	10.0	10.0	10.0	10.0	10.0	9.1
	6		10.0	10.0	10.0	10.0	10.0	10.0
	7		10.0	10.0	10.0	10.0	10.0	10.0

A = Air  
P = Product pressure

**Table 2 - Shut-off and Change-over valves**

Max. pressure in bar against which the valve can open.

Actuator / Valve body combination and direction of pressure	Air pressure (bar)	Plug position	Valve size					
			DN 25 DN/OD 25 mm	DN 40 DN/OD 38 mm	DN50 DN/OD 51 mm	DN 65 DN/OD 63.5 mm	DN 80 DN/OD 76.1 mm	DN 100 DN/OD 101.6 mm
TD 461-058_1		NO	10.0	10.0	10.0	7.4	9.7	6.3
TD 461-059_1	5	NO	10.0	7.8	10.0	6.1	7.1	4.7
	6		10.0	10.0	10.0	8.3	9.9	6.6
	7		10.0	10.0	10.0	10.0	10.0	8.5
TD 461-060_1	5	NC	10.0	10.0	10.0	6.6	7.5	4.9
	6		10.0	10.0	10.0	9.0	10.0	6.9
	7		10.0	10.0	10.0	10.0	10.0	8.8
TD 461-061_1		NC	10.0	9.7	10.0	6.8	9.1	6.1

A = Air  
P = Product pressure

**Actuator function**


- Pneumatic downward movement, spring return.
- Pneumatic upward movement, spring return.
- Pneumatic upward and downward movement A/A.




Dimensions (mm)

Nominal size	Inch tubes						DIN tubes					
	DN/OD						DN					
	25	38	51	63.5	76.1	101.6	25	40	50	65	80	100
A <sub>1</sub>	313	314	364	390	423	468	315	315	365	389	427	470
A <sub>2</sub>	328	334	389	415	453	498	330	335	390	414	457	500
A <sub>3</sub>	360*	374	437	476	522	592	367*	379	440.6	481	534	596
A <sub>4</sub>	372*	391	459	498	549	619	379*	396	463	503	561	623
C	47.8	60.8	73.8	86.3	98.9	123.6	52	64	76	92	107	126
OD	25	38	51	63.5	76.1	101.6	29	41	53	70	85	104
ID	21.8	34.8	47.8	60.3	72.9	97.6	26	38	50	66	81	100
t	1.6	1.6	1.6	1.6	1.6	2	1.5	1.5	1.5	2	2	2
E	50	49.5	62	82	87	120	50	49.5	62	78	87	120
F <sub>1</sub>	15	20	25	25	30	30	15	20	25	25	30	30
F <sub>2</sub>	12*	17	22	22	27	27	12*	17	22	22	27	27
H	85	85	114.9	114.9	154.3	154.3	85	85	114.9	114.9	154.3	154.3
H (high pressure)	85	114.9	154.3	154.3	154.3	154.3	85	114.9	154.3	154.3	154.3	154.3
M (ISO clamp)	21	21	21	21	21	21	-	-	-	-	-	-
M (DIN clamp)	-	-	-	-	-	-	21	21	21	28	28	28
M (DIN male)	-	-	-	-	-	-	22	22	23	25	25	30
M (SMS male)	20	20	20	24	24	35	-	-	-	-	-	-
<b>Weight (kg)</b>												
Shut-off valve	3.1	3.3	5.5	6.5	11.3	13.6	3.2	3.4	5.5	6.6	11.8	13.6
Change-over valve	3.9	4.2	7.1	8.5	14	18	4.1	4.5	7.2	8.8	14.9	17.9

\* = only available with replaceable elastomer plug seal.

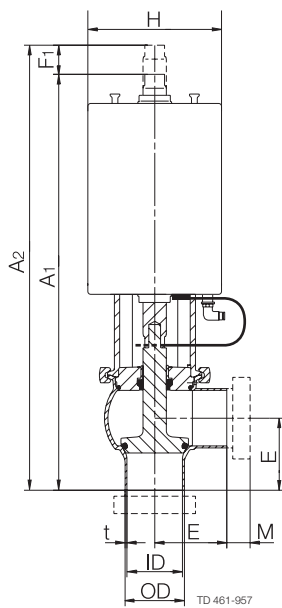

Shut-off valve

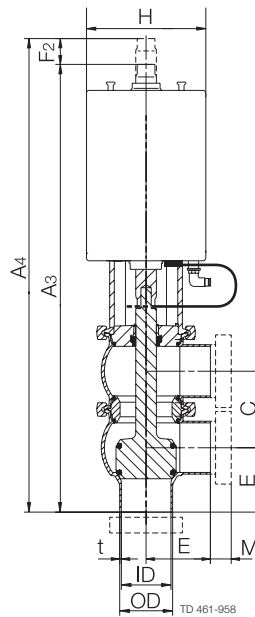

Change-over valve

**Please Note!**

**Opening/closing time will be effected by the following:**


- The air supply (air pressure).
- The length and dimensions of the air hoses.
- Number of valves connected to the same air hose.
- Use of single solenoid valve for serial connected air actuator functions.
- Product pressure.

**Air Connections Compressed air:**

R 1/8" (BSP), internal thread.

**Technical Data**

Max. product pressure .....1000 kPa (10 bar).  
 Min. product pressure .....Full vacuum (depending on valve specifications).  
 Temperature range .....-10°C to +135°C (standard EPDM seal).  
 Air pressure, actuator .....500 to 700 kPa (5 to 7 bar).  
 Ambient temperature .....-10°C to +40°C.

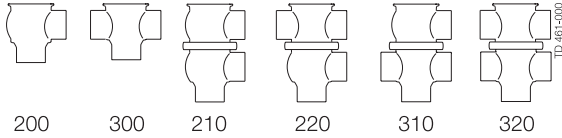**Valve Body Combinations**

Air consumption (litres free air) for one stroke			
Size	DN25-40	DN50-65	DN80-100
	DN/OD 25-38 mm	DN/OD 51-63.5 mm	DN/OD 76.1-101.6 mm
NO and NC	0.2 x air pressure [bar]	0.5 x air pressure [bar]	1.3 x air pressure [bar]
A/A	0.5 x air pressure [bar]	1.1 x air pressure [bar]	2.7 x air pressure [bar]

**Materials - valve/actuator**

Product wetted steel parts .....1.4404 (316L) (internal Ra < 0.8 µm).  
 Other steel parts .....1.4301 (304).  
 Plug seal .....EPDM.  
 Other product wetted seals .....EPDM (standard).  
 Other seals .....NBR.  
 Actuator stem .....PAGG PAGI/GT, MH, 14-250, CF40.  
 Spring .....Coated steel.

**Options**

- A. Male parts or clamp liners in accordance with required standard.
- B. Control and Indication: ThinkTop Basic Intrinsically Safe.
- C. Product wetted seals in HNBR or FPM (Note! Temperature range -10°C to +135 °C for ATEX Versions).
- D. Plug seals in HNBR or FPM (Note! Temperature range -10°C to +135 °C for ATEX Versions).
- E. External surface finish bright.

**Ordering**

Please state the following when ordering:

- Size.
- Connections if not welding ends.
- Valve body combination.
- NC, NO or A/A.
- Options.

**Note!**

For further details, see instruction manual ESE00674.



**Gillain & Co**

HYGIENIC EQUIPMENT FOR FOOD & LIFE SCIENCES



**Gillain & Co**

HYGIENIC EQUIPMENT FOR FOOD & LIFE SCIENCES



ESE00673EN 1001

The information contained herein is correct at the time of issue,  
but may be subject to change without prior notice.

---